


SR2020C THRU SR20A0C

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts Forward Current - 20.0 Amperes

TO-220AB

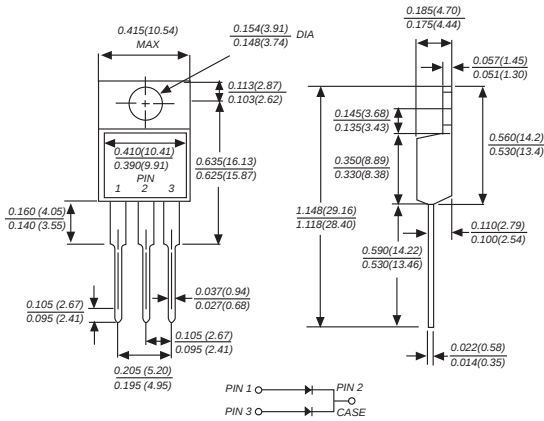

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 260°C, 0.25" (6.35mm) from case for 10 seconds

MECHANICAL DATA

Case: TO-220AB molded plastic body

Terminals: Leads solderable per MIL-STD-750, Method 2026

Polarity: As marked

Mounting Position: Any

Weight: 0.08 ounce, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	SR 2020C	SR 2030C	SR 2040C	SR 2045C	SR 2050C	SR 2060C	SR 2070C	SR 2080C	SR 2090C	SR 20A0C	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	45	50	60	70	80	90	100	VOLTS
Maximum RMS voltage	V _{RMS}	14	21	28	32	35	42	49	56	63	70	VOLTS
Maximum DC blocking voltage	V _{DC}	20	30	40	45	50	60	70	80	90	100	VOLTS
Maximum average forward rectified current at Tc(see fig.1)	I _(AV)	20.0										Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150.0										Amps
Maximum instantaneous forward voltage at 10.0A	V _F	0.55				0.75		0.85				Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	1.0										mA
		15.0				50.0						
Typical junction capacitance (NOTE 1)	C _J	550				450				pF		
Typical thermal resistance (NOTE 2)	R _{θJC}	2.0										°C/W
Operating junction temperature range	T _J	-65 to +125				-65 to +150				°C		
Storage temperature range	T _{STG}	-65 to +150										°C


Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to case

RATINGS AND CHARACTERISTIC CURVES SR2020C THRU SR20A0C

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

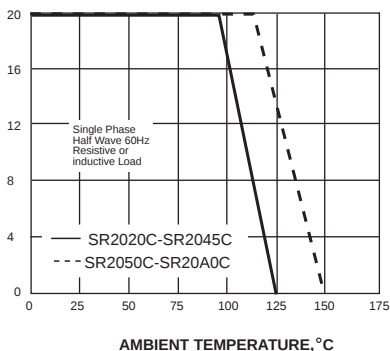

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

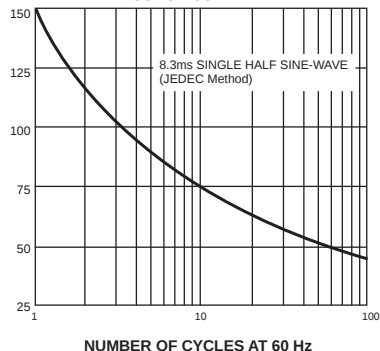


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

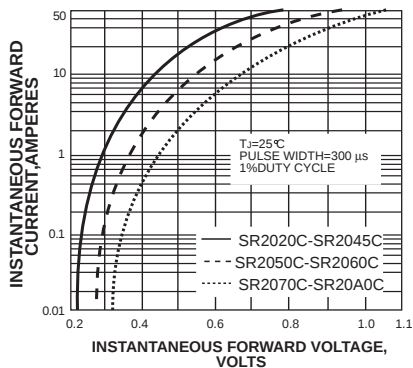


FIG. 4-TYPICAL REVERSE CHARACTERISTICS


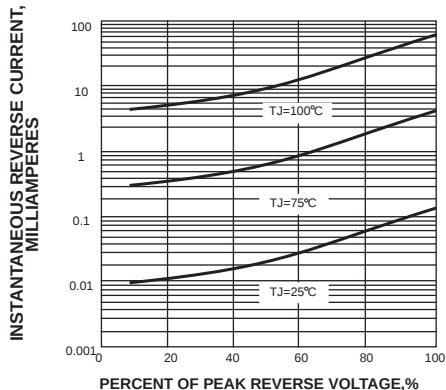


FIG. 5-TYPICAL JUNCTION CAPACITANCE



TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

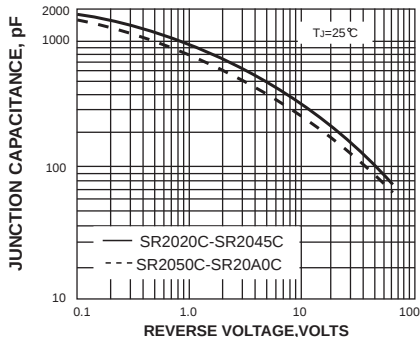